


Model 2-R WINDOW BUBBLE

Low Profile Rectangular Style Bubble for Masonry or Wood Window Wells

This model is used for rectangular style masonry or wood window wells where the basement window does not extend above the top of the well. Model 2-R is designed to rest on the well top covering the well top by a minimum of 2". The back flange rests against the house wall and is 3 to 4" high, giving added strength and allowing for caulking along the house wall. The Window Bubble dome is 4" to 5" high, which gives this unit its low profile appearance and maximum load strength.

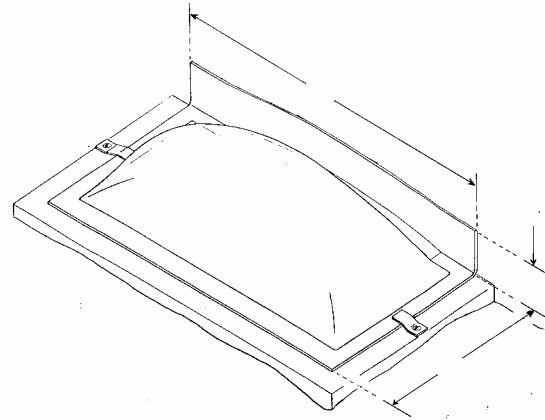

Special Circumstances


We do not advise drilling holes in this unit, either in the flange area or the bubble itself. Do not cut the bubble in any location without first calling our office for recommendations. If you have a dryer vent, wires or pipes extending from this well, we may recommend using Model 2-R with a redwood extension, Model 2-R with a redwood base or Model 3-R.

We Use Only High Quality Materials

The Window Bubble is formed from 3/16" PLEXIGLAS® Acrylic. If a redwood extension or base is needed, 4/4" (3/4") thick, clear all heart California redwood is used. We use redwood because of its superior resistance to decay.

Installation is Simple

Model 2-R is fastened to the well top with 2 aluminum pressure clips. We recommend one on each side at the side flange of the bubble. Place the clip at the desired location and mark the slot on the well top. If the surface is concrete or brick, drill a 1/4" hole (1" deep) with a masonry drill bit. Insert the plastic anchor and screw the clip to the well top. Tighten all screws until snug. DO NOT OVER TIGHTEN.

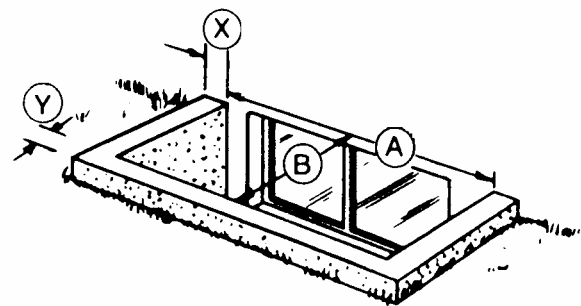

Model 2-R Window Bubble covers rectangular style masonry or wood wells.

Dilworth Manufacturing Company
Creators of the Window Bubble®

PO Box 158, Honey Brook, PA 19344-0158

Toll Free Phone: 888-624-8699

Toll Free Fax: 877-859-7226